

Product Options




7.5mm (2.5mm+5mm) x 48" (1.2m)

Physical Data

PERFORMANCE CRITERIA	TEST	RESULT
Tensile Strength	ASTM D 412	>200 PSI
Flexibility ¼" mandrel	ASTM F 137	Pass
Thermal Conductivity	ASTM C 518	>0.4
Static Load Limit	ASTM F 970 @ 250PSI	0.004" Typical
Coefficient of Friction	ASTM D 2047	> 0.9
V.O.C. Compliant	ASTM D 5116	Yes
Abrasion Resistance	ASTM D 3389 / EN 649	<1q, 100 cycles
Pill Test	ASTM D 2859	Pass
Vertical Deflection / Deformation	ASTM F 2772	0.73mm
Surface Effect Slip Resistance	ASTM F 2772	Pass
Ball Rebound	ASTM F 2772	99.7%
Force Reduction	ASTM F 2772	12.6%

Can a floor take a beating and look good doing it?

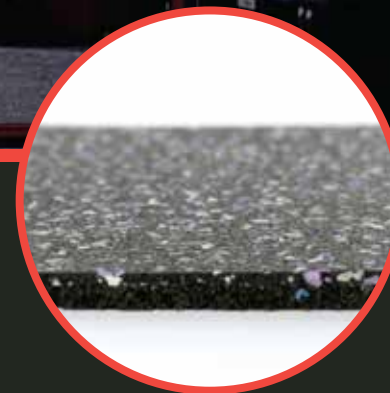

Yes.

Stacked Performance Motivate

is 7.5mm surface tailored for light strength and conditioning.



What does it take to be a floor?

- ✓ Durable
- ✓ Sustainable
- ✓ Affordable
- ✓ Ease of Maintenance
- ✓ Slip Resistant

With a durable wear layer made from vulcanized EPDM rubber, this product resists the scuffing and marking that is common in strength and conditioning applications.




Can a floor do more? Yes.

This dual durometer flooring system features a premium 2.5mm rubber planting surface that is fusion bonded to a 5mm performance base layer. The result: a balanced distribution of force reduction and energy restitution, designed for the shift in fitness from equipment to more functional training.


Applications



Cardio



Light Weights



Selectorized Equipment

