





REC 60

MORE CUSHIONING, GREAT DURABILITY

REC 60 offers more cushioning as well as thicker wearlayer, making it the best option of the Recreation range for sports activities combined with some multi-purpose activities

- ▶ 0.23" (6 mm) thick with 0.06" (1.5 mm) pure vinyl wearlayer
- ▶ Comfort/Force Reduction : $\geq 27\%$ - $\leq 33\%$
- ▶ Provides cushion and safety for children and teens from recess to sports activities
- ▶ Meets ASTM F2772 Class 2 for safe sports and play
- ▶ Wood designs are available in 86' 6" long rolls and are designed for standard gymnasium court sizes, which means less seams and better looking floors
- ▶ PURProtect surface treatment for no wax, easy maintenance, and enhanced stain resistance

 | 4'11" |  |  100% recyclable

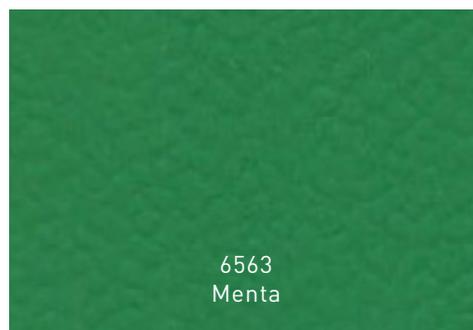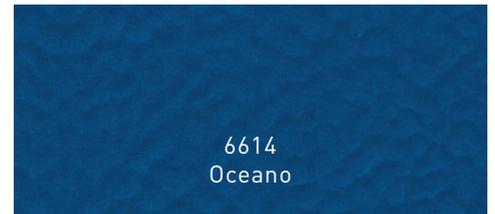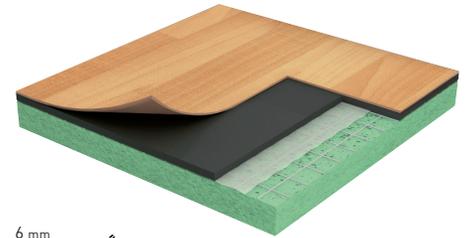

REC 60

MORE CUSHIONING, GREAT DURABILITY

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
PRODUCT DESCRIPTION				
Reference Specification	ASTM F1303	-	Type 1, Grade 1	Type 1, Grade 1
Surface Treatment	-	-	PURProtect UV Factory Applied	PURProtect UV Factory Applied
Foam	ASTM F1303	-	Class C: Cushion Foam Backing	Class C: Cushion Foam Backing
Total Thickness	ASTM F386	-	0.24" (6.0 mm)	0.24" (6.0 mm)
Total Wearlayer	ASTM F410	-	0.06" (1.5 mm)	0.06" (1.5 mm)
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86' 6" (26.4 m)	67' 3" (20.5 m)
Weight	-	-	0.76 lb/ft ² (3.7 kg/m ²)	0.76 lb/ft ² (3.7 kg/m ²)
TECHNICAL CHARACTERISTICS				
Sport Properties	ASTM F2772	Class 1	Class 2	Class 2
Force Reduction/ Cushioning	ASTM F2569	≥ 10%	≥ 27% - ≤ 33%	≥ 27% - ≤ 33%
Static Load (175 psi)	ASTM F970	≤ 0.005"	≤ 0.004" (0.1 mm)	≤ 0.004" (0.1 mm)
Static Load (250 psi)	ASTM F970	-	≤ 0.006" (0.15 mm)	≤ 0.006" (0.15 mm)
Impact Sound Insulation	EN ISO 171-2	-	19 dB	19 dB
Fire Rating	ASTM E648	Class 1	Class 1	Class 1
SUSTAINABILITY HEALTH & SAFETY				
Antimicrobial Treatment	-	-	Sanosol^{HYGIENE}	Sanosol^{HYGIENE}
Allergen Free	-	-	OK	OK
Indoor Air Quality / Low Emitting Materials	EQc2 LEED v4	-	Floorscore™	Floorscore™
TVOC After 28 Days	ISO 16000-6	-	<100 µg/m ³	<100 µg/m ³
Ease of Maintenance	-	-	No Wax, No Buff for Life / PURProtect	No Wax, No Buff for Life / PURProtect
Plant Certifications	-	-	ISO 14001 and ISO 9001	ISO 14001 and ISO 9001
Restriction Use of Harmful Chemicals	MRC4 LEEDv4	-	Complies with REACH	Complies with REACH
Production Waste	-	-	100% Manufacturing Waste Recycled	100% Manufacturing Waste Recycled
Recycled Content	MRC3 LEED v4	-	36%	36%
End of Life	-	-	100% Recyclable	
INSTALLATION METHOD				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 80% RH (≤ 5 lb)	<i>mw</i>	
Moisture Mitigation System		≤ 92% RH (≤ 10 lb)	ISOLSPORT	
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions.			