










EVERY RECREATION PRODUCT FEATURES:



















ASTM F2772 COMPLIANCE

Kids will be kids. Unlike VCT and carpet, Recreation by Taraflex® meets the American Indoor Sports Flooring Safety Standard, preventing unnecessary impact injury and lessening your liability.

COMFORT BACKING

Recreation has cushion backing technology to reduce the risk of immediate injury.

NO BURNS

Recreation has a burn-free surface, which means no more rug burns.

FLOORSCORE® CERTIFIED

Breathe easy on Recreation flooring, as it is FloorScore® Certified, allergen free, and antimicrobial.

17dB-19dB NOISE REDUCTION

Noise management control and comfort underfoot for teachers standing long hours.

DURABILITY & VERSATILITY

Recreation's stain resistance and thick wearlayer make it ideal for flexible temporary spaces such as lunch rooms, recess rooms, and study halls.

LOW COST, LOW MAINTENANCE

PUR Protect® surface treatment means no wax, no buff for life, low maintenance, and low cost of total ownership.


STOCKING PROGRAM

Best-selling wood designs and our most popular colors are always in stock and ready to ship.

15-YEAR WARRANTY

When installed in accordance with Gerflor's installation instructions, all Recreation products carry a 15-Year Limited Warranty.

RECREATION FOR SAFE PLAY AND MULTIPURPOSE FLOORING SOLUTIONS

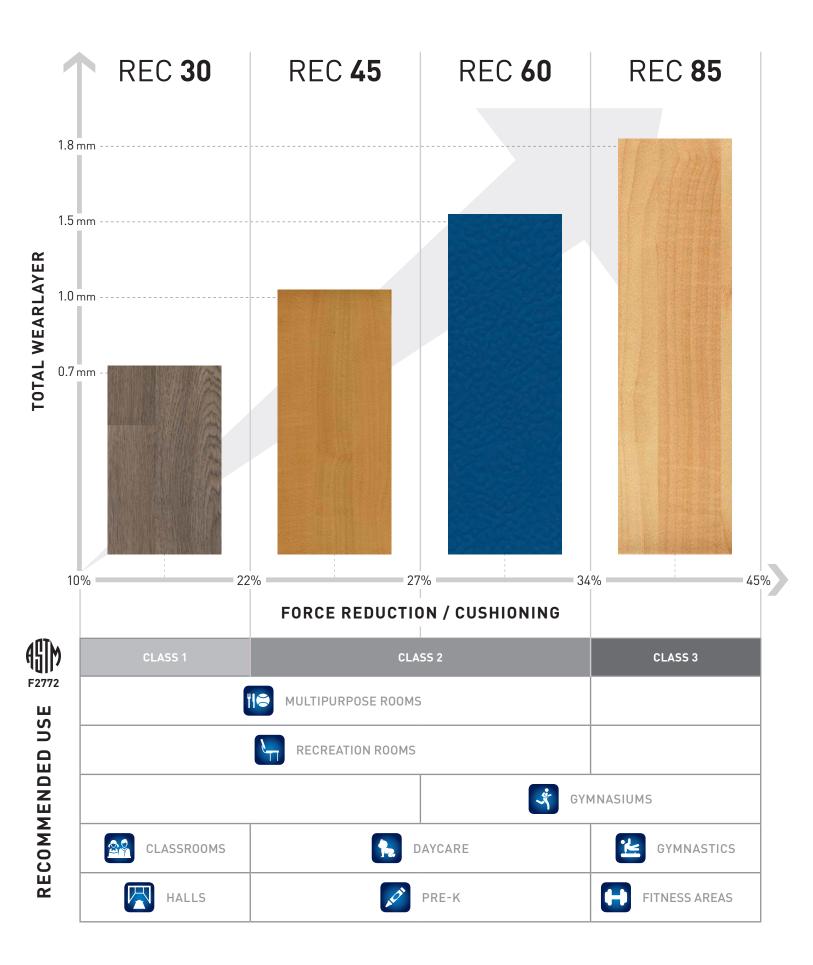

REC 30





THE COMFORT-BACKED, NO WAX ALTERNATIVE TO VCT



- Commercial grade sheet flooring ideal for cafeterias, break rooms, recess rooms, classrooms, hallways, and more
- 0.13" (3.2 mm) thick with 0.03" (0.7 mm) pure vinyl wearlayer
- Noise control management up to 17 dB
- PUR Protect surface treatment for ease of maintenance and reduced maintenance cost
- No wax, no buff for life
- Meets ASTM F2772 Class 1 for indoor sports properties



6047 Classic Wood | REC 30



6045 Golden Wood | REC 30




REC 45





IDEAL FOR EVERYDAY PLAY




- REC 45 is recommended for light recreational activities and general multipurpose use
- 0.18" (4.5 mm) thick
- 0.04" (1 mm) thick vinyl wearlayer
- Comfort / Force Reduction: ≥ 22% ≤ 27%; meets ASTM F2772 Class 2
- Noise control management up to 18 dB
- Wood designs available in 86' 6" long rolls designed for standard gymnasium court sizes for fewer seams and better looking floors

REC 60





SAFER PLAY WITH IMPROVED CUSHIONING & DURABILITY




- REC 60 offers more cushioning as well as a thicker wearlayer, making it a great option for sports activities combined with some multipurpose activities
- 0.24" (6 mm) thick
- 0.06" (1.5 mm) thick vinyl wearlayer
- Comfort / Force Reduction: ≥ 27% ≤ 33%;
 meets ASTM F2772 Class 2
- Noise control management up to 19 dB
- Wood designs available in 86' 6" long rolls designed for standard gymnasium court sizes for fewer seams and better looking floors

REC 85





ACTIVITY-MINDED SAFETY, CUSHIONING & DURABILITY



- REC **85** brings a performance-oriented combination of force reduction and durability at the top of the Recreation range
- 0.33" (8.5 mm) thick
- 0.07" (1.8 mm) thick vinyl wearlayer
- Comfort / Force Reduction: ≥ 34% ≤ 45%; meets ASTM F2772 Class 3
- Noise control management up to 19 dB
- Ideal for gymnasiums as well as fitness areas
- Wood designs available in 86' 6" long rolls designed for standard gymnasium court sizes for fewer seams and better looking floors

REC 45, REC 60 & REC 85





WOOD DESIGNS AND ACCENT COLORS



6062 Canadian Maple | REC 45, REC 60 & REC 85



6058 American Oak | REC 45 & REC 60



6563 Menta | REC 45 & REC 60



2402 Azul | REC 45 & REC 60



6614 Oceano | REC 60



6160 Naranja | REC 45 & REC 60



6154 Roja | REC 45 & REC 60



2711 Gris | REC 45 & REC **60**

DURABLE AND VERSATILE

Recreation's stain resistance and thick wearlayer make it ideal for flexible, multipurpose rooms.

STOCKED IN THE USA

Recreation's most popular wood designs and colors are always in stock and ready to ship.





skin burns for safe play.

No solvent.

for reduced shock

upon impact.



gerflorusa.com gerflorcanada.com

DESCRIPTION	STANDARDS	REQUIREMENTS	RECREATION 30	RECREATION 30 RECREATION 45			TION 60	RECREATION 85
PRODUCT DESCRIPTION			WOOD DESIGN	WOOD DESIGN	SOLID COLOR	WOOD DESIGN	SOLID COLOR	W00D DESIGN
Reference Specification	ASTM F1303	-	Type 1, Grade 1					
Surface Treatment	-	-	PUR Protect® UV Factory Applied					
Foam	ASTM F1303	-	Class C: Cushion Foam Backing					
Total Thickness	ASTM F386	-	0.13" (3.2 mm)	0.18" (4.5 mm)		0.24" (6.0 mm)		0.33" (8.5 mm)
Total Wearlayer	ASTM F410	-	0.03" (0.7 mm)	0.04" (1 mm)		0.06" (1.5 mm)		0.07" (1.8 mm)
Roll Width	-	-	6′ 6″ (2 m)	4' 11" (1.5 m)		4' 11" (1.5 m)		4' 11" (1.5 m)
Roll Length	-	-	82' (25 m)	86′ 6″ (26.4 m)	67' 3" (20.5 m)	86′ 6″ (26.4 m)	67' 3" (20.5 m)	86′ 6″ (26.4 m)
Weight	-	-	0.47 lb/ft² (2.3 kg/m²)		lb/ft² kg/m²)	0.76 lb/ft² (3.7 kg/m²)		0.95 lb/ft² (4.6 kg/m²)
TECHNICAL CHARACTERISTI	cs							
Sport Properties	ASTM F2772	Class 1	Class 1	Class 2		Class 2		Class 3
Force Reduction / Cushioning	ASTM F2569	≥ 10%	≥ 10% - ≤ 22%	≥ 22% - ≤ 27%		≥ 27% - ≤ 33%		≥ 34% - ≤ 45%
Static Load (175 psi)	ASTM F970	≤ 0.005	≤ 0.002"	≤ 0.003"		≤ 0.004"		≤ 0.005"
Impact Sound Insulation	EN ISO 171-2	-	17 dB	18 dB		19 dB		19 dB
Fire Rating	ASTM E648	Class 1	Class 1					
SUSTAINABILITY HEALTH & S	SAFETY							
Antimicrobial Treatment	-	-	PUR Protect®					
Antibacterial: Combats MRSA, E. coli, and S. aureus.*	ISO 22196	-	Inhibits the spread of bacteria at 99%					
Allergen Free	-	-	OK					
Indoor Air Quality / Low Emitting Materials	EQc2 LEED v4	-	FloorScore®					
TVOC After 28 Days	ISO 16000-6	-	<100 μg/m³					
Ease of Maintenance	-	-	No Wax, No Buff for Life / PUR Protect [®]					
Plant Certifications	-	-	ISO 14001 and ISO 9001					
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	Complies with REACH					
Production Waste	-	-	100% Manufacturing Waste Recycled					
Recycled Content	MRc3 LEED v4	-	12%	12% 29%			5%	28%
INSTALLATION METHOD								
Full-Spread Adhesive	ASTM F2170	≤ 95% RH (≤ 10lb)	m					
Moisture Mitigation System	(F1869) < 92% RH (< 10lb) ISOLSPORT							
WARRANTY	15-year limited warranty when installed in accordance with Gerflor's installation instructions.							

^{*}The implementation of an effective cleaning method is the best defense against infection.









